

# SPECIFICATION SHEET

XINJE PLC & HMI (Combined)

XMP2-32



## PRODUCT DESCRIPTION

This unit combines the strengths of our PLCs and HMIs into one easy package, making for a very compact and cost effective solution for many smaller applications. Along with all our other PLCs this unit has a Modbus 485 port built in to be used for either a master or slave application.


With the addition of the analogue card full PID can be implemented.



## SPECIFICATION



## NETWORKING

XMP2-32	
Power Supply	AC Supply, 150mA
Digital Input Channels	16 (24V DC PNP)
Digital Output Channels	16 (Relay, Transistor, mix)
Display Type	ColourTFT LCD
Colours	256
Display Size	7"
Display Area	480 x 234
Function Keys	26
Memory	4MB

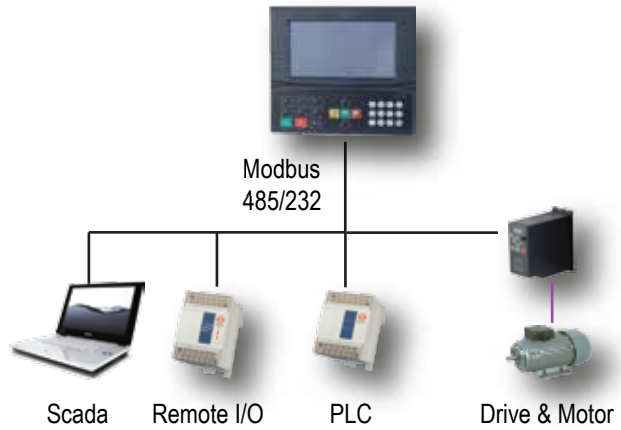

- Floating Point
- High speed inputs
- C Functions
- PID Control
- Modbus Port

## DIMENSIONS

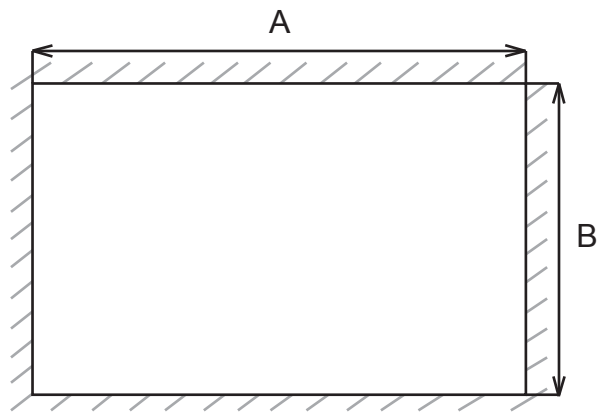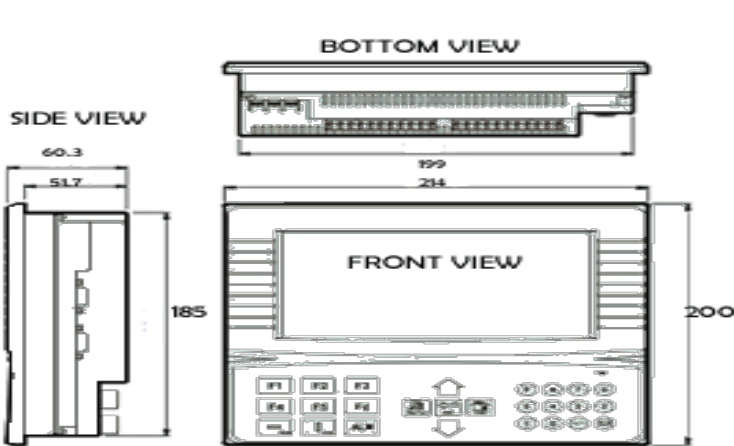

Cutout size (unit mm) : (A)201 x (B)187  
 Actual size (unit mm) : 214 x 200